





COLOURS




BLUE LAGOON




COSMIC STORM




CREAM




FROST




GRAVEL GREY




GREYSTONE




GRIT




PEBBLE




PURE WHITE



SCOTIA FIR



VELLUM





WASH




APOLLO[®] SOLID SURFACE

MODULAR SYSTEM


please specify handing

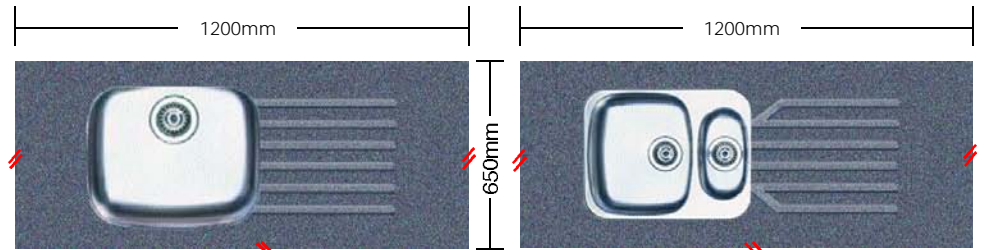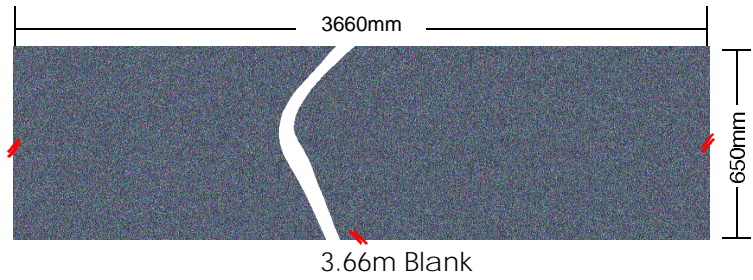


1.2m with single stainless steel bowl

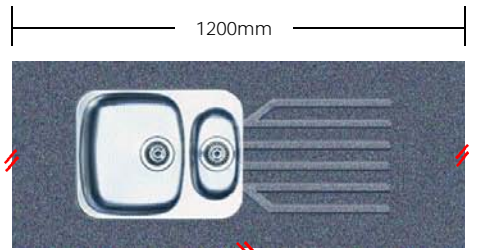


1.2m with one & half stainless steel bowl

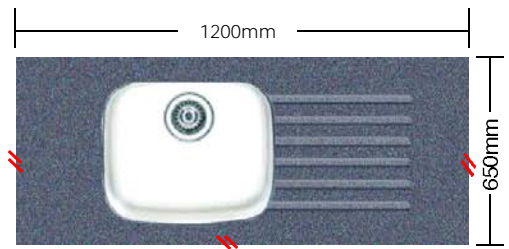


1.2m with single solid surface bowl

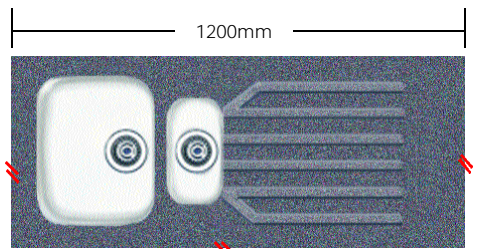

1.2m with one & half solid surface bowl

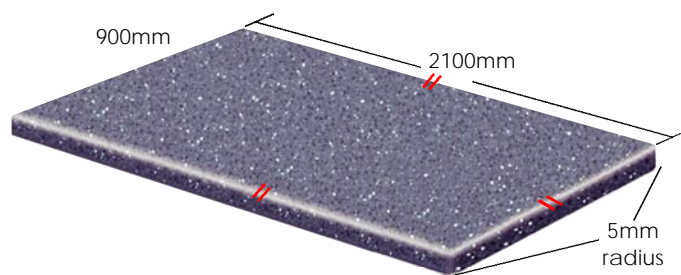




Breakfast Bar

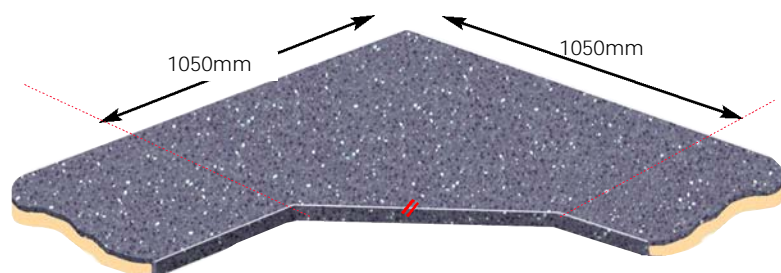

Corner Solution

FABRICATED

APOLLO[®] SOLID SURFACE

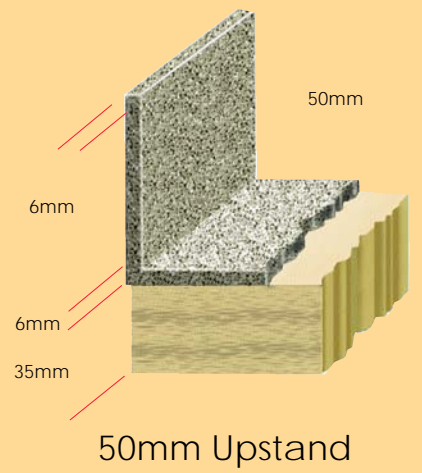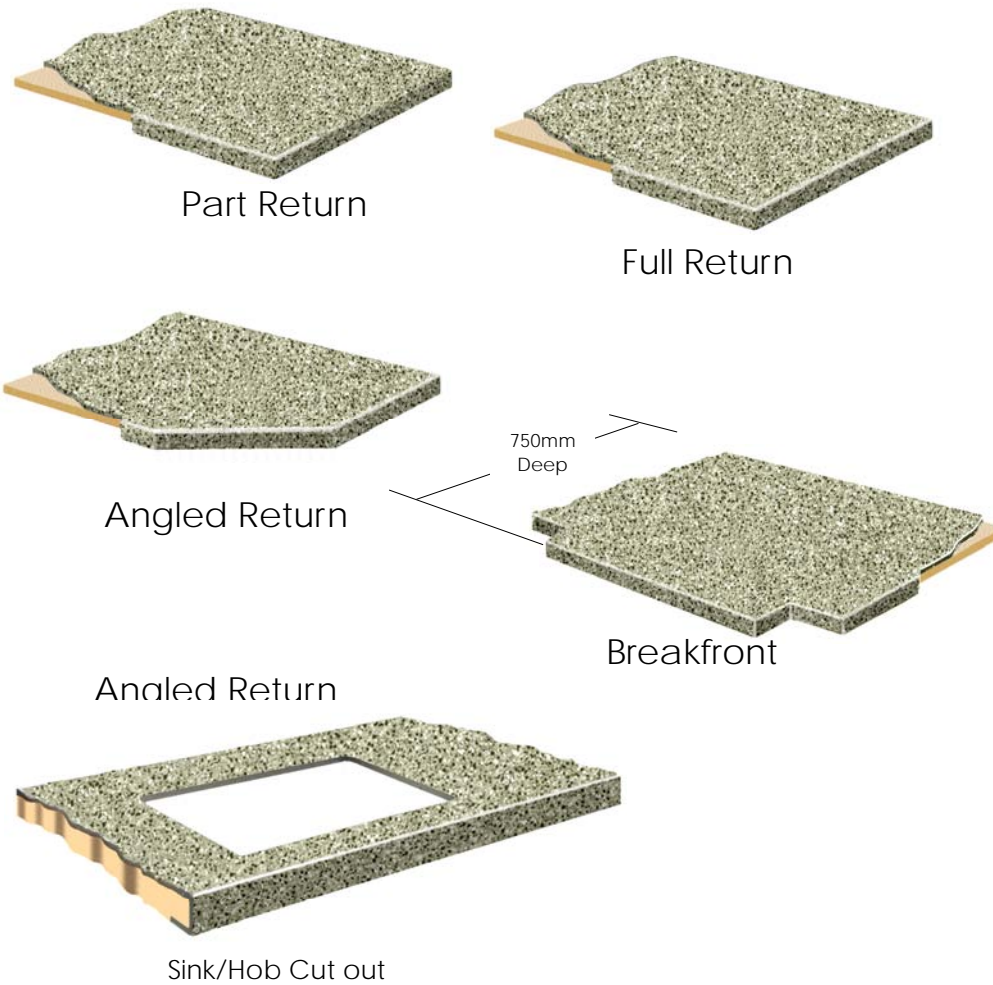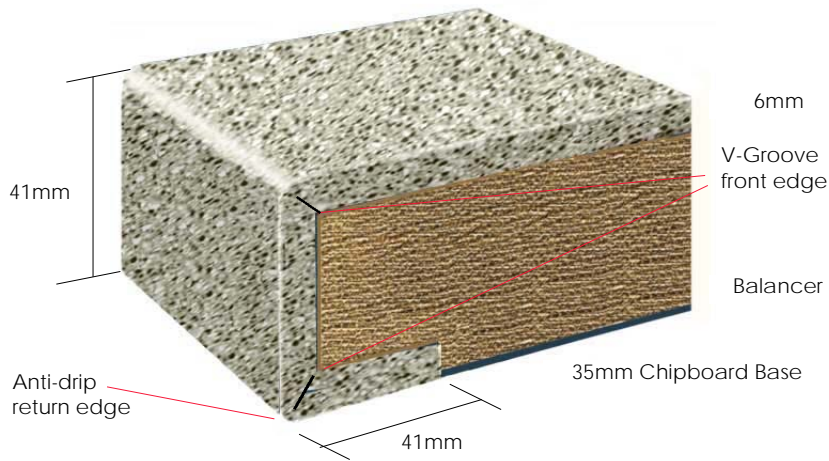


HOT PAN PLATTER (13mm)



DRAINER GROOVES




TYPE A

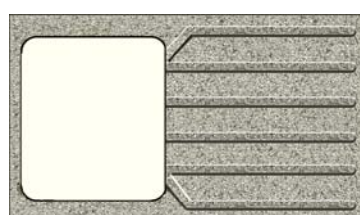

TYPE B

Type A & B Drainer Grooves are 3mm Deep, 10mm wide.

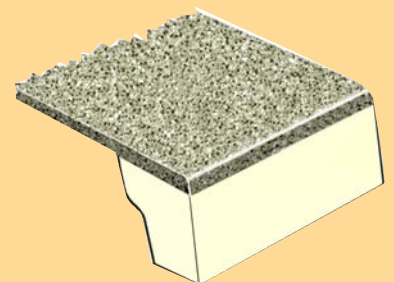

Undermounted

APOLLO[®] SOLID SURFACE



CARE & MAINTENANCE KIT

The Sheridan Care & Maintenance kit includes everything you need to keep your worktop in first class condition, simply follow the instructions for a trouble free, good looking worktop.

We feel that the inclusion of our Care Kit, is a **must**, given a number of problems which in our experience are often preventable.

Including this kit will greatly reduce the occurrence of such problems in the future.

A Care Kit will be sent out with every worktop order, the cost will be shown on all our quotations and invoices.

Contents of the Kit

1 bottle of 500ml Cream Cleaner, 1 bottle of 500ml of Detergent, 1 pair of disposable gloves, 2 Cloths, 1 Red Scotchbrite, 1 Grey Scotchbrite, 1 Sanding disc, 1 Care & Maintenance Booklet.

Cream Clean

Ideal for those stubborn marks that appear from time to time on your worktop. Mildly abrasive solution that should remove the large majority of marks.

Detergent

Keep your worktop clean by applying our specially formulated cleaner regularly to your worksurface.

For general cleaning of your worktop this should be diluted 1 - 100. For heavier grease and some stains this dilution rate can be reduced accordingly.

To remove heavy grease and stains, it may be necessary to use concentrated detergent, leaving it for up to 15 mins, then simply wash away.

For more comprehensive details of the care procedure for your Apollo[®] worksurface, see the Care and Maintenance booklet supplied with the Care & Maintenance Kit.



TECHNICAL SPECIFICATIONS

APOLLO[®] SOLID SURFACE

Apollo[®] Solid Surface is a 6mm thick solid surface applied and bonded to 35mm chipboard and laminate balancer to underside.

Impact resistant – is equally as good as 13mm solid surface on an MDF subframe!!

SINKS

Apollo[®] Solid Surface sinks are available in white.

POINTS TO NOTE

Hob flange needs to sit on aluminium thermal insulation tape around cut-out, to avoid conducting too much heat into the Apollo[®] Solid Surface and causing cracking.

Once installed looks like a 13mm solid surface for a fraction of the cost.

For fabricated worktops, we work to your measurements, no templating allowed.

Free installation training.

Can be made in blanks to adjust on site without compromising any of the above - oversize on the joints then trim to suit.

Drainers are only 3mm deep and 10mm wide.

HOT STUFF!!

Hot pans keep well away - use hot pan platter provided.

INSTALLED BY YOU

No templating means a saving in time and cost.

Installation is charged at 10% of the retail cost of the worksurface.

Due to it's acrylic based composition, Apollo[®] Solid Surface will expand and contract by approximately 1mm per metre – to avoid the material cracking, the worksurfaces are not tightly installed to allow for this movement.

A fine layer of dust is inevitable for 24 hours after installation.

We have fully qualified and vastly experienced installation teams throughout the UK to provide you with an excellent fitting service, if required.



PROPERTIES

- Excellent impact resistance
- Pleasing to the eye
- Warm and inviting to touch
- Choice of 16 colours
- Ideal for vanity tops, worksurfaces, cladding etc.
- Seamless Joints

CUT-OUTS

- A minimum of 130mm is required between two hob cut-outs.
- A minimum of 80mm is required between hob and sink cut-outs
- A minimum of 50mm is required between two sink cut-outs.
- Sink cut-outs are placed 90mm from the worktop front edge.

AESTHETICS

COLOUR	Colour Match	Site Joint Visibility	Upstand Colour Change
Blue Lagoon	Good	Slight	Slight
Cosmic Storm	Excellent	None	None
Cream	Good	None	None
Frost	Excellent	None	None
Gravel Grey	Poor	Slight	Slight
Greystone	Poor	Slight	Slight
Grit	Good	Slight	None
Pebble	Excellent	None	None
Pure White	Excellent	None	None
Scotia Fir	Good	Slight	Slight
Vellum	Good	None	None
Wash	Poor	None	None